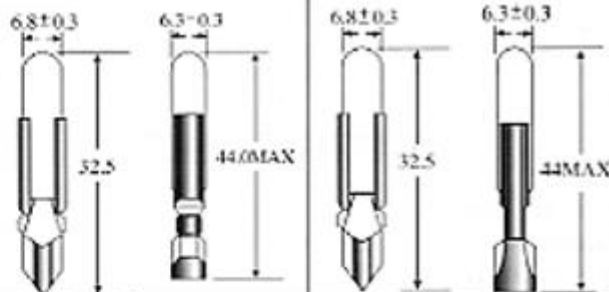


T-2**MINIATURE LAMPS****Applications:
Indicator
Telephone****Switchboard**

LINE NO.	DESIGN		M.S.C.P. (APPROX.)	LIFE (HRS.)	FILAMENT SHAPE	T-68F	T-68G
	VOLTS	AMPS				SLIDE BASE	SLIDE BASE
1	6.0	.020	.015	5000	C-2R	PE6F 6020	PE6G 6020
2	6.0	.040	.050	5000	C-2V	PE6F 6040	PE6G 6040
3	6.0	.050	.060	5000	C-2V	PE6F 6050	PE6G 6050
4	6.0	.200	.400	5000	C-2R	PE6F 6200	PE6G 6200
5	12.0	.020	.032	5000	C-2V	PE6F 1220	PE6G 1220
6	12.0	.040	.120	5000	C-2F	PE6F 1240	PE6G 1240
7	12.0	.050	.130	5000	C-2F	PE6F 1250	PE6G 1250
8	12.0	.100	.315	5000	C-2F	PE6F 12100	PE6G 12100
9	24.0	.020	.105	5000	C-2F	PE6F 2420	PE6G 2420
10	24.0	.040	.220	5000	C-2F	PE6F 2440	PE6G 2440
11	24.0	.050	.300	5000	C-2F	PE6F 2450	PE6G 2450
12	24.0	.080	.500	5000	C-2F	PE6F 2408	PE6G 2408
13	30.0	.020	.104	5000	C-2F	PE6F 3220	PE6G 3220
14	30.0	.040	.280	5000	C-2F	PE6F 3240	PE6G 3240
15	30.0	.050	.340	5000	C-2F	PE6F 3250	PE6G 3250
16	36.0	.020	.140	5000	C-2F	PE6F 3620	PE6G 3620
17	36.0	.030	.200	5000	C-2F	PE6F 3630	PE6G 3630
18	36.0	.040	.350	5000	C-2F	PE6F 3640	PE6G 3640
19	48.0	.020	.200	5000	CC-2F	PE6F 4820	PE6G 4820
20	48.0	.025	.220	5000	CC-2F	PE6F 4825	PE6G 4825
21	48.0	.030	.340	5000	CC-2F	PE6F 4830	PE6G 4830
22	48.0	.040	.400	5000	CC-2F	PE6F 4840	PE6G 4840
23	48.0	.050	.400	5000	CC-2F	PE6F 4850	PE6G 4850
24	48.0	.060	.500	5000	CC-2F	PE6F 4860	PE6G 4860
25	60.0	.020	.150	5000	CC-2F	PE6F 60020	PE6G 60020
26	60.0	.040	.350	5000	CC-2F	PE6F 60040	PE6G 60040
27	60.0	.050	.570	5000	CC-2F	PE6F 60050	PE6G 60050