

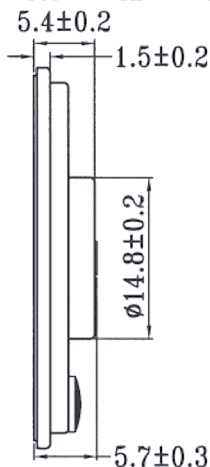
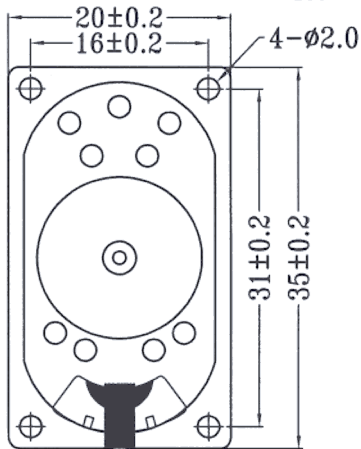


1	MODEL	2035CP08(GP)			
2	Dimension	20X35X5.7H	Weight	5.5	Gram.
3	Magnet	Materials Rare Earth	Size	ø11Xø2.0X1.5	mm.
4	Nominal Impedance	8	Ohm	± 15 %	
5	Power Rating	Normal	1.0	W.	Maximum 2.0 W.
6	Lowest Resonant Frequency	500	±	100	Hz
7	Output Sound Pressure Level	80 ± 3 dB / 1 Watt 1 Meter.			
8	Frequency Range	400~20K	Hz.	Average SPL-10	dB.
9	Distortion	5 %	Maximum At	1000	Hz 1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By	2.83	Volts	Sine Wave.
11	Load Test	White Noise with Weighted Filter	2.83	Volts. (RMS)	96 Hrs.
12	Operation Temperature	-25°C ~ +70°C			
13	Storage Temperature	-40°C ~ +85°C			
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC Current to the "+" or "Marked" Terminal.			
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.			

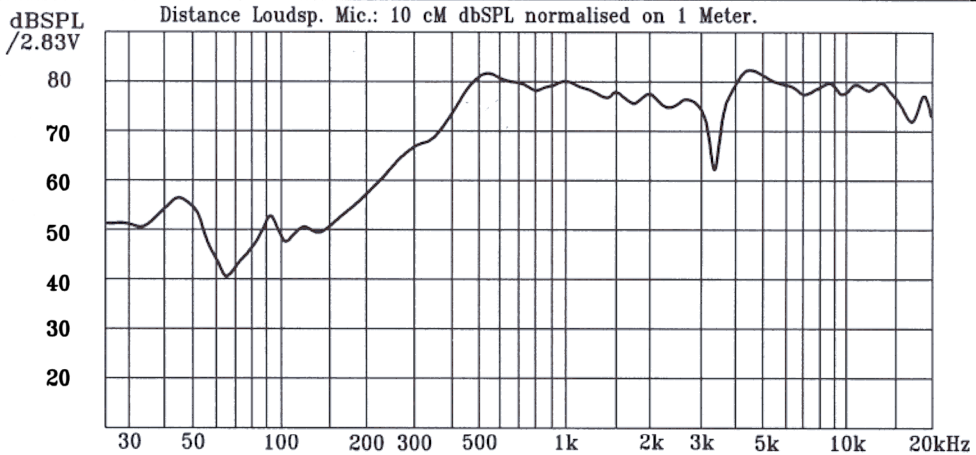

Unit:mm

0602A