

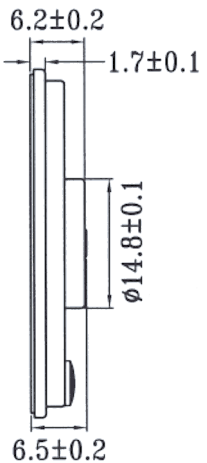
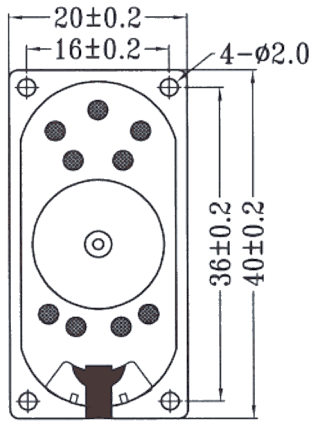


1	MODEL	2040CP08(GP)			
2	Dimension	20X40X6.5H		Weight	6.3 Gram.
3	Magnet	Materials	Rare Earth	Size	ø11Xø2.0X1.5 mm.
4	Nominal Impedance	8 Ohm	± 15 %	At	1000 Hz
5	Power Rating	Normal	1.0 W.	Maximum	2.0 W.
6	Lowest Resonant Frequency	500	±	100	Hz
7	Output Sound Pressure Level (S.P.L.)	80 ± 3 db / 1 Watt 1 Meter.			
		Average at	600,800,1000,1200		Hz
8	Frequency Range	300~20K	Hz.	Average SPL~10	db.
9	Distortion	5 %	Maximum At	1000 Hz	1.0 W.
10	Abnormal Sound Test	Must be Normally Tested By 2.83 Volts Sine Wave.			
11	Load Test	White Noise with Weighted Filter 2.83 Volts. (RMS) 96 Hrs.			
12	Operation Temperature	-25°C ~ +70°C			
13	Storage Temperature	-40°C ~ +85°C			
14	Polarity	Diaphragm shall move Forward when Apply a Positive DC			
		Current to the "+" or "Marked" Terminal.			
15	Remarks	Above specifications on the strength of CNS4784 and CNS4785.			

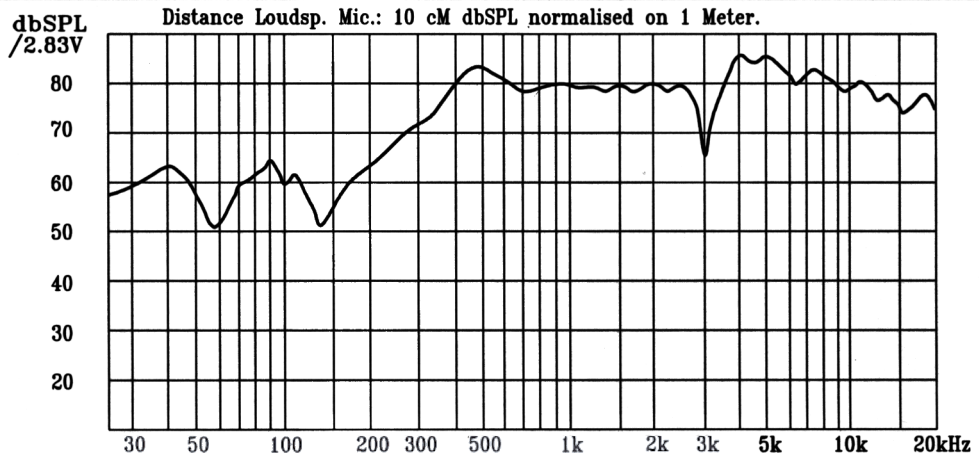

Unit:mm

0409C